

Project:	Lincoln Southern Bypass	Date:	07/12/2017
		TN Ref:	0002
Subject:	Options for A607 Overbridge		
Author:	Jon Pecina	Project Ref:	738233-WSP-SBR-XX-RP-S-0002
Reviewed:	Gauravkumar Panchal	Date:	06/12/2017
Approved:	Mark Northing	Date:	06/12/2017

1. Introduction

A new route to the south of the city of Lincoln linking the A15 at Waddington to the A46 at South Hykeham has been proposed which is known as Lincoln Southern Bypass (LSB). The proposed scheme is required to alleviate the current congestion and journey reliability issues associated with the south of the city of Lincoln which will also complete the ring road around the city. There are three bridge structures identified to form the LSB. This document outlines the design criteria and procedures to be adopted for the design of A607 Bridge.

The purpose of this desk study is:

- To identify the location of the structure;
- To review the known constraints;
- To identify the unknown constraints;
- To propose initial sizing of the structure;
- To prepare the viable solutions for the bridge structure;
- To provide the comparison between the possible solutions and recommendations;
- To identify the possible risks and hazards of the recommended solutions.

The ground condition at structure location appeared to be poor. Various options for bridge widening or replacement have been reviewed and evaluated. Table 2 summarising and comparing various structural types, and other factors including design, constructability, aesthetics, future maintenance, traffic and environmental impacts.


2. The Site

2.1. Description

The scheme located to the south of the city of Lincoln joining the A15 at Waddington to the A46 at South Hykeham. The route will run south-west from the A15 at Bracebridge Heath, passing through fields to the north of RAF Waddington, crossing the A607 Grantham Road before heading sharply down the slope and across Station Road, Waddington. After this, the route passes flat lying fields up to the junction of Brant Road and Somerton Gate Lane before heading further west across the River Witham and to the south of the village of South Hykeham. The route turns north-west past the town, crossing Boundary Lane and further fields before joining the existing A46 Hykeham roundabout. At Waddington, the site level is around 70m Above Ordnance Datum (AOD) to the top of the Lincoln Edge where the level drops sharply to about 40m AOD at the toe of the scarp. The ground then gently falls to about 10m AOD in the Witham valley and remains around this level to the A46 roundabout.

The structure will be located at the south of Lincoln, on A607 by the Waddington RAF base, as identified in the pictures below.

2.2. Location Plan

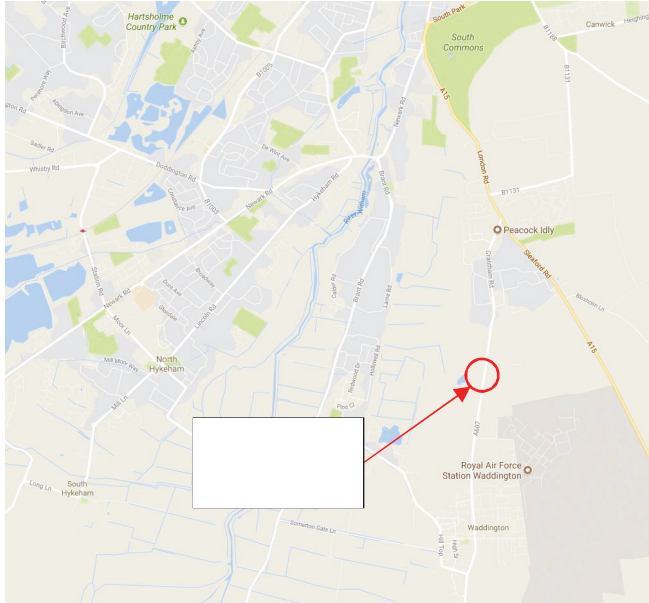

3. Site Constraints

The site constraints can be grouped into the following categories:

- Headroom;
- NMU routes;
- Statutory undertakers;
- Archaeological Survey information;
- Environmental constraints;
- Third party land ownership; and,
- Geotechnical information.

3.1. Headroom

The minimum headroom clearance between the soffit of the overbridge and the proposed highway level will be in accordance with TD 27/05. As per Table 6.1 of TD 27/05 the standard headroom for new Overbridges has to be at least 5.30m plus a sag curve. The minimum vertical clearance between beam soffit and the proposed highway level is 5.325m.

3.2. NMU routes

An existing NMU route is identified on the A607 Grantham Road. It comprises an off-highway shared pedestrian and cycle route, 1.5m wide, adjacent to the southbound carriageway. According to this, it is proposed to provide continuity over A607 Bridge, with a 3m wide footway along the south edge.

3.3. Statutory undertakers

The information of statutory undertakers will be updated once it is available. Reference should be made to the corresponding drawings. Information should include gas, water, electricity and

telecommunications plant cross the bridge. Trial holes should be carried out to confirm the presence of services during preliminary design stage.

Table 1 Statutory Summary

Authority	Service	Details	Location
Network Rail	Hazards	Not present	

3.4. Archaeological constraints

There is no archaeological survey data available. The information may potentially affect the location of the foundations/substructures. The archaeological information will be updated once it is available.

3.5. Environmental constraints

An archaeological survey has been planned for this area. This information may affect the location of the foundations/substructures.

It should be noted that green belt seems to present to the east of the River Witham. This should be confirmed by environmental survey. If green belt presents in this area, a design option that reduced the impact on the green belt should be taken into consideration.

3.6. Third party land ownership

The horizontal alignment of the LSB may still be subjected to change, which may affect the extent of third party land use.

However, land ownership details have currently not been requested from HM Land Registry. It should be noted that the proposed locations are surrounded by farm lands. It is thought unlikely that this will have a significant bearing upon proposals, however, it is recommended that land ownership details should be obtained during this stage to confirm the assumptions.

3.7. Geotechnical information

The geotechnical information will be updated once it is available. It should be noted that the geotechnical information should include an asbestos survey to clarify the risk of asbestos in the proposed area. It should also include any other information of ground conditions that may affect the design proposals.

4. Design Requirements

The outline design of the bridge has been progressed using the following criteria:-

Geometric dimensions of the A607 carriageway over the bridge:

East footway + cycling path:	3.00 m
Single carriageway:	7.30 m
North footway:	1.00 m
Others (Parapet Plinth etc):	1.00 m
Total width of proposed structure:	12.30 m

Geometric dimensions of the NHRR carriageway under the bridge:

South footway:	1.80 m
South verge:	1.00 m
South hardstrip:	1.00 m
Single carriageway:	7.30 m
North hardstrip:	1.00 m
North verge:	1.00 m
North NMU path:	3.50 m
Total clear, squared span of proposed structure:	16.60 m

The minimum headroom clearance between the soffit of the bridge and the existing ground level has been taken as 5.70m (as previously suggested). It should be noted that the dimensions may vary in preliminary design.

5. Proposed Options

There are two types of bridges considered for bridge skew spans approximately 20m and a skew angle of about 28° at the optioneering stage. The two proposed options are:

- 1) Precast pre-stressed concrete beams with in-situ slab and concrete infill;
- 2) Weathering steel I beams with in-situ reinforced concrete slab.

5.1. Option 1 – Precast beams with a cast in-situ deck

This section is to be read in conjunction with drawing 738233-WSP-SBR-XX-RP-DR-C-0003 attached to this document in Appendix A.

The bridge will be single span structure with approximate skew span of 20m at a skew angle of approximately 28°. The actual length of the span may vary based on the outcome of the geotechnical investigation on a later stage, which may lead to foundations being positioned at a different location.

The superstructure shall comprise of 23No. TB or similar Precast beams. The beams will be made composite with a 300mm thick in-situ reinforced concrete deck slab. The beams span into integral insitu reinforced concrete diaphragms spanning transversely between the supports at the abutments. The abutment will be cast monolithically with superstructure to get advantage of integral structure form.

The parapets will be supported by in-situ reinforced concrete edge beam. The deck cantilever soffit angles will vary to provide a constant depth of edge beam along the structure. N2 parapets with mesh infill have been proposed on both sides of the overbridge and approach ramps.

The abutment wall supported by reinforced concrete piled foundation. The design of the piles will be confirmed at preliminary design stage when geotechnical information is available.

Reinforced concrete retaining structures will be constructed to contain the backfill. The details of which will be specified at a later stage.

Top down construction method to be employed for the bridge construction. It reduces the traffic disruption to the A607. The different stages are summarised below in chronologic order:

- Provision of temporary access to the site and diversion of the A607.
- Construct pile foundations and pile caps for abutments.
- Construct abutments.
- Land precast beams on the abutments.
- Construct the retaining walls and backfill up to the bearing shelf level.
- Erect falsework for abutment diaphragm.
- Cast the deck slab and the end diaphragms.
- Complete the construction of reinforced concrete walls and backfill.
- Decommissioning of the falsework for beams after the concrete has attained its designated strength.
- Construct the bridge parapets.
- Apply deck waterproofing and deck surfacing.
- Install bridge verges, apply deck surfacing and install movement joints.

- Install bridge furniture.

Advantages:-

- The bridge would be easy to construct compared to the conventional cast-in-situ construction. The precast concrete beams are cast offsite and lifted on their position.
- Low future maintenance cost as the structure would be integral at the piers and semi-integral at the abutments.
- The precast and reinforced concrete bridge elements will require fairly low maintenance costs compared to steel beam option.
- This option may have less environmental impacts due to less future maintenance requirements.
- The span length would result in a beam height of approximately 1.8m at mid-span. This would produce a lower road profile than when compared to using pre-cast concrete beams.

Disadvantages:-

- The pre-stressed concrete beams (and deck) are heavier compared to steel beams and require substantially larger substructure, hence higher construction cost.
- The option involves the lifting of heavy construction elements including the precast concrete beams.
- The option also involves the casting of in-situ reinforced concrete elements such as abutments, piers and deck slab.

5.2. Option 2 – Steel Composite Beams and In-situ Deck

This section is to be read in conjunction with drawing 738233-WSP-SBR-XX-RP-DR-C-0004 attached to this document in Appendix A.

The bridge will be an integral, single span steel-composite structure that spans 20m over the LSB, at an skew angle of approximately 28°. The actual length of the span may vary based on the outcome of the geotechnical investigation on a later stage, which may lead to foundations being positioned at a different location.

The superstructure shall comprise of 5No. fabricated steel girders. The beams will be made composite with a 300mm thick in-situ reinforced concrete deck slab. The beams span into integral insitu reinforced concrete diaphragms spanning transversely between the supports at the abutments. The abutment will be cast monolithically with superstructure to get advantage of integral structure form.

The parapets will be supported by in-situ reinforced concrete edge beam. The deck cantilever soffit angles will vary to provide a constant depth of edge beam along the structure. N2 parapets with mesh infill have been proposed on both sides of the overbridge and approach ramps.

The abutment wall supported by reinforced concrete piled foundation. The design of the piles will be confirmed at preliminary design stage when geotechnical information is available.

Reinforced concrete retaining structures will be constructed to contain the backfill. The details of which will be specified at a later stage.

Top down construction method to be employed for the bridge construction. It reduces the traffic disruption to the A607. The different stages are summarised below in chronologic order:

- Provision of temporary access to the site and diversion of the A607.
- Construct pile foundations and pile caps for abutments.
- Construct abutments.
- Land steel beams on the abutments.
- Construct the retaining walls and backfill up to the bearing shelf level.
- Erect falsework for abutment diaphragm.
- Cast the deck slab and the end diaphragms.
- Complete the construction of reinforced concrete walls and backfill.
- Decommissioning of the falsework for beams after the concrete has attained its designated strength.
- Construct the bridge parapets.
- Apply deck waterproofing and deck surfacing.
- Install bridge verges, apply deck surfacing and install movement joints.
- Install bridge furniture.

Advantages:-

- The structure would be easy to construct as the steel fabrication work would be done offsite.
- The lifting weight for steel beams would be lower when compared to precast concrete beams. A relatively lighter crane would be required to place the beams in to the position. Lighter construction also reduces the substructure cost.

Disadvantages:-

- The cost of construction using steel beams would be higher than the cost of using precast concrete beams.
- There may be disruption to traffic during future maintenance work.
- The option also involves the casting of insitu reinforced concrete elements such as abutments, piers and deck slab.
- Routinely inspections and maintenance will be required, although the use of weathering steel might lower down the costs and maintenance work frequency.
- The span length would result in a beam height of approximately 1.0m at mid-span. This would produce a slightly deeper road profile than when compared to using pre-cast concrete beams.

5.3. Options Summary


Table 2 Structures Options Summary

Option Ref	Relative Ease of construction	Specialist site preparation	Extensive temporary works Required?	Complex construction methodology	Design life / Extension	Maintenance costs	Aesthetics	Environmental Impact
Option 1 (Precast beams with a cast in-situ deck)	Simple	Require temporary site/access	Moderate – but vast majority of precast components will be cast offsite, and crane-lifted into the position	No	120 yrs	Low	Standard	Normal
Option 2 (Steel composite beams and in-situ deck)	Simple	Require temporary site/access	Moderate – but vast majority of steel fabrication will be assembled offsite, and crane-lifted into the position	No	120 yrs	Moderate - Low	Standard	Normal


6. Risks and Hazards

The possible risks and hazards have been listed below:


1. The A607 structures put forward as part of the conceptual design may vary in their geometry as changes in the vertical/horizontal alignment happen.
2. The vertical alignment used does not make provision for the headroom requirements –i.e. 5.7m. According to this, the carriageway level has been lowered down to the required level in order to maintain the minimum vertical clearance specified.
3. Bridge excavations, e.g. walls and other structures. Falling into excavations, groundwork collapse, slope instability, construction workers.
4. Setting up formworks for foundations and walls during construction. Temporary instability. Instability of cured concrete structures, such as walls, piers and foundations. Instability of temporary works, such as setting up formworks. And Instability of permanent structure during construction. Construction workers.
5. Craning or lifting operations. Failure during lifting due to asymmetric lifting, uncontrolled lifting, Construction workers.
6. Access for maintenance. Exposure to live traffic, working from height etc. for maintenance.
7. Maintenance Operatives.
8. Presence of services (relocating existing STATS during construction/demolition). Electrocutation - striking services leading to injury. Construction workers.
9. Hot work carried out for steel composite bridge widening. Welding and cutting - working under hot environment lead to injury and vision damage.
10. Agree software that should be used in preliminary and detail stage.

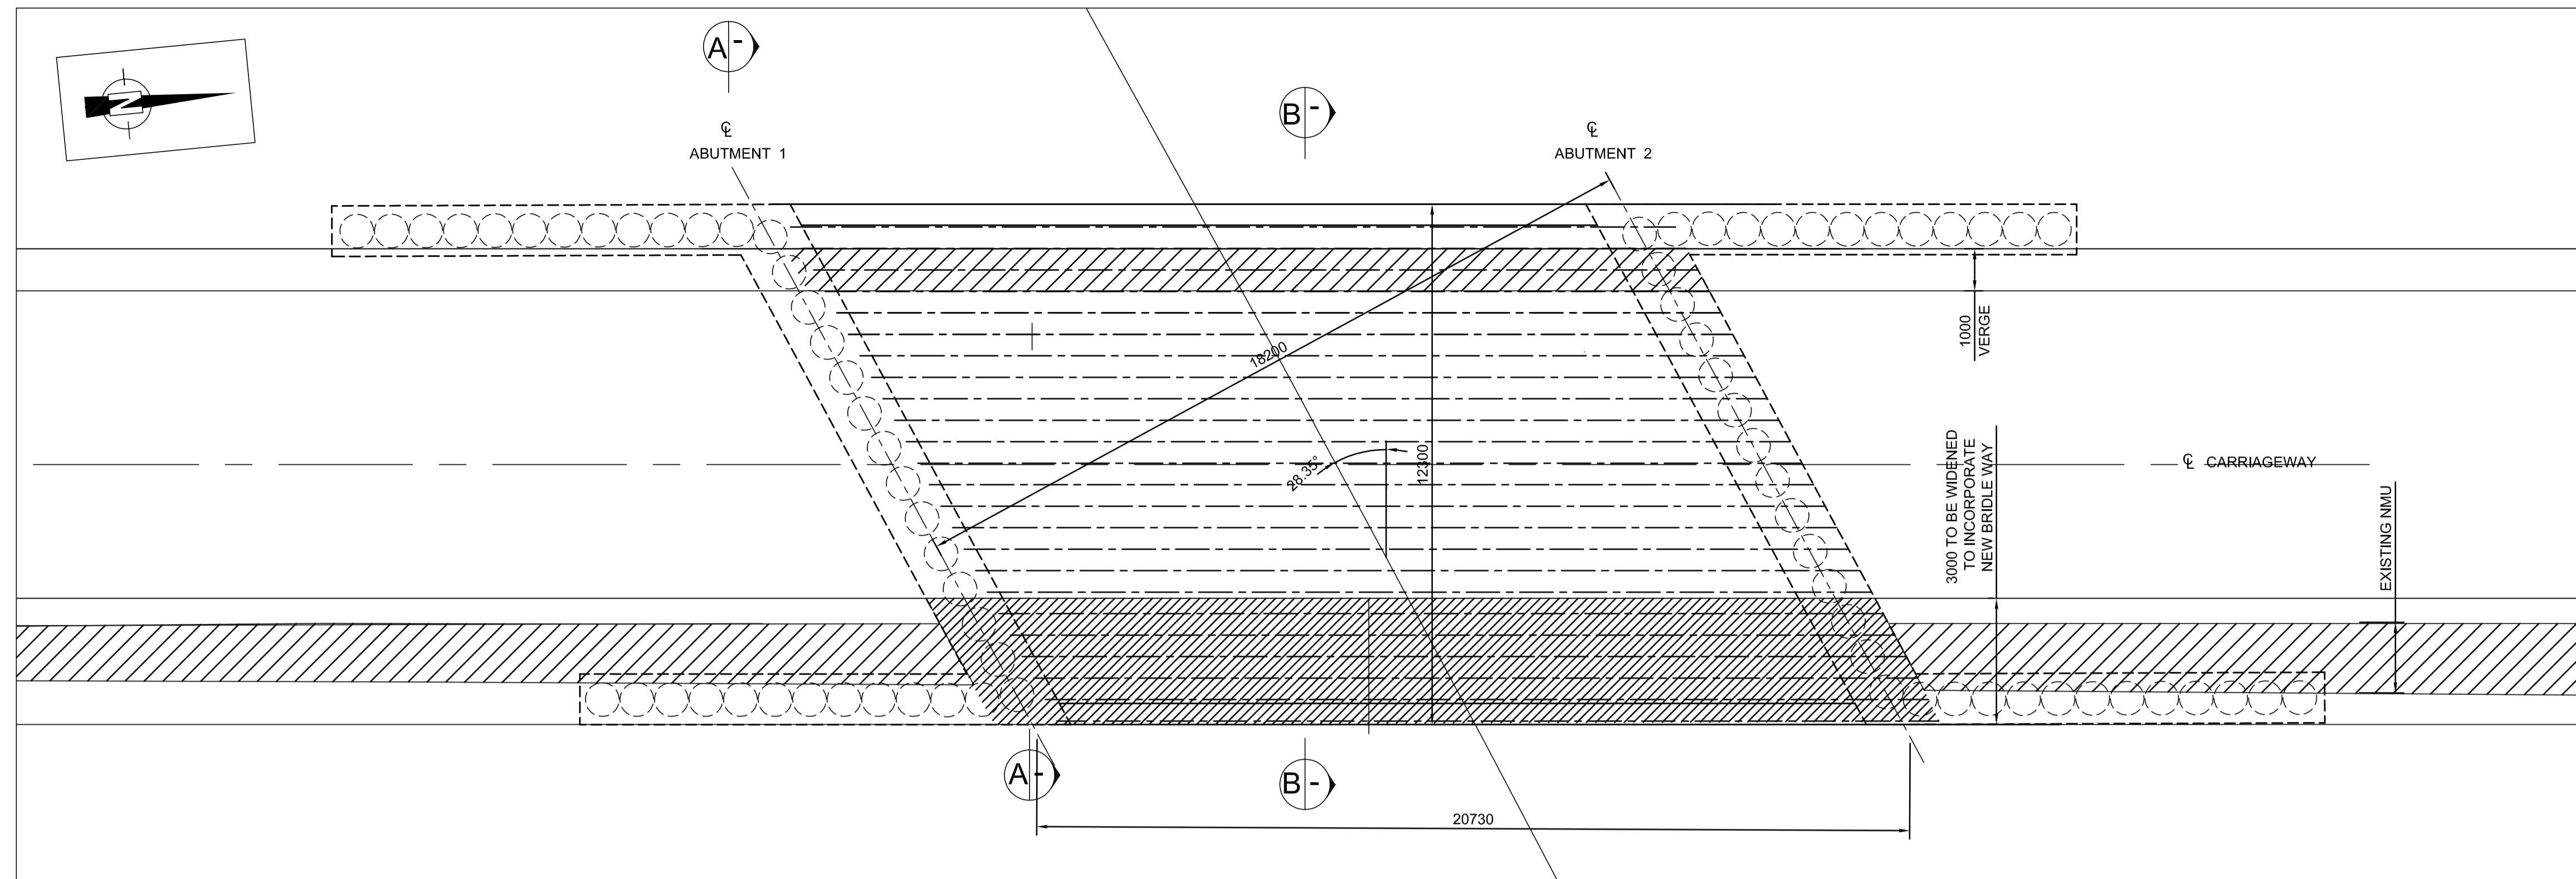


PLAN
Scale 1:100

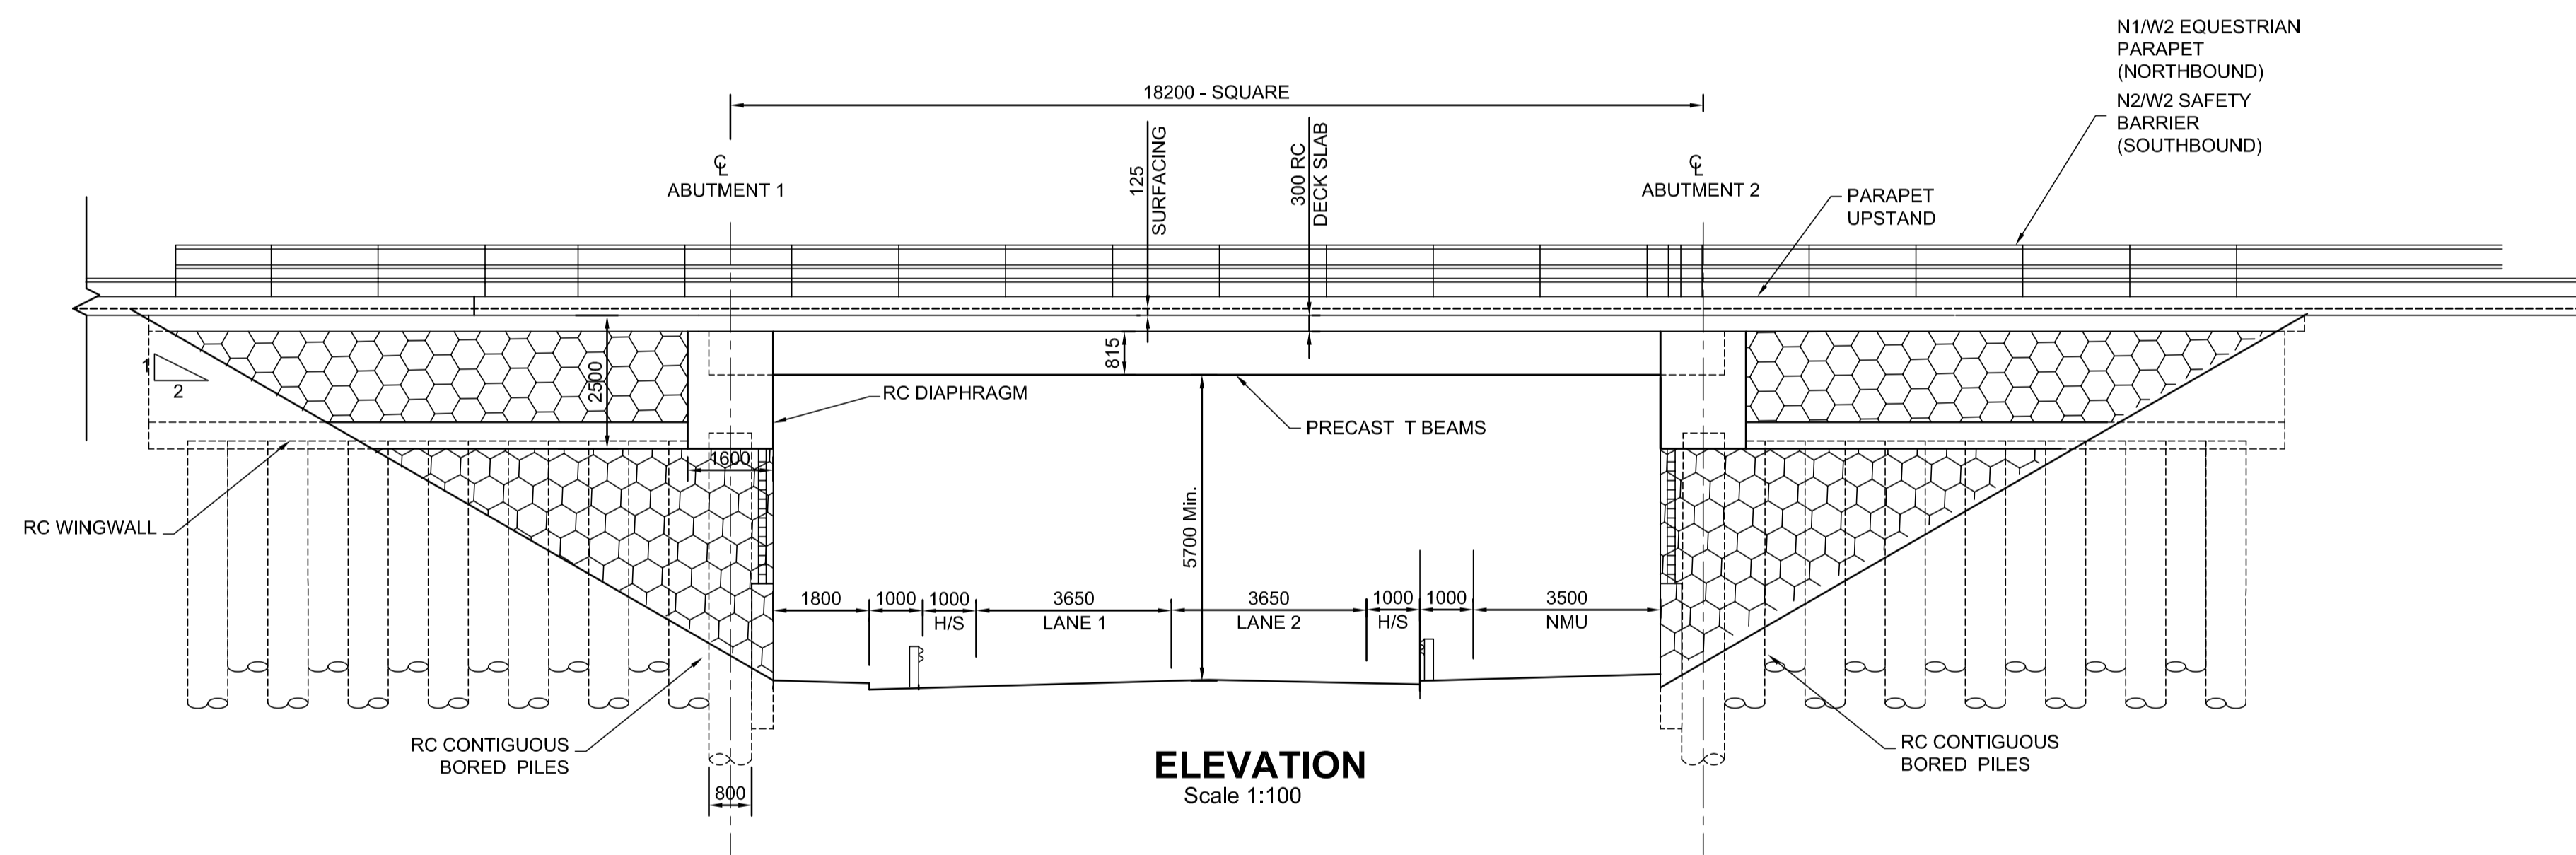

ELEVATION
Scale 1:100

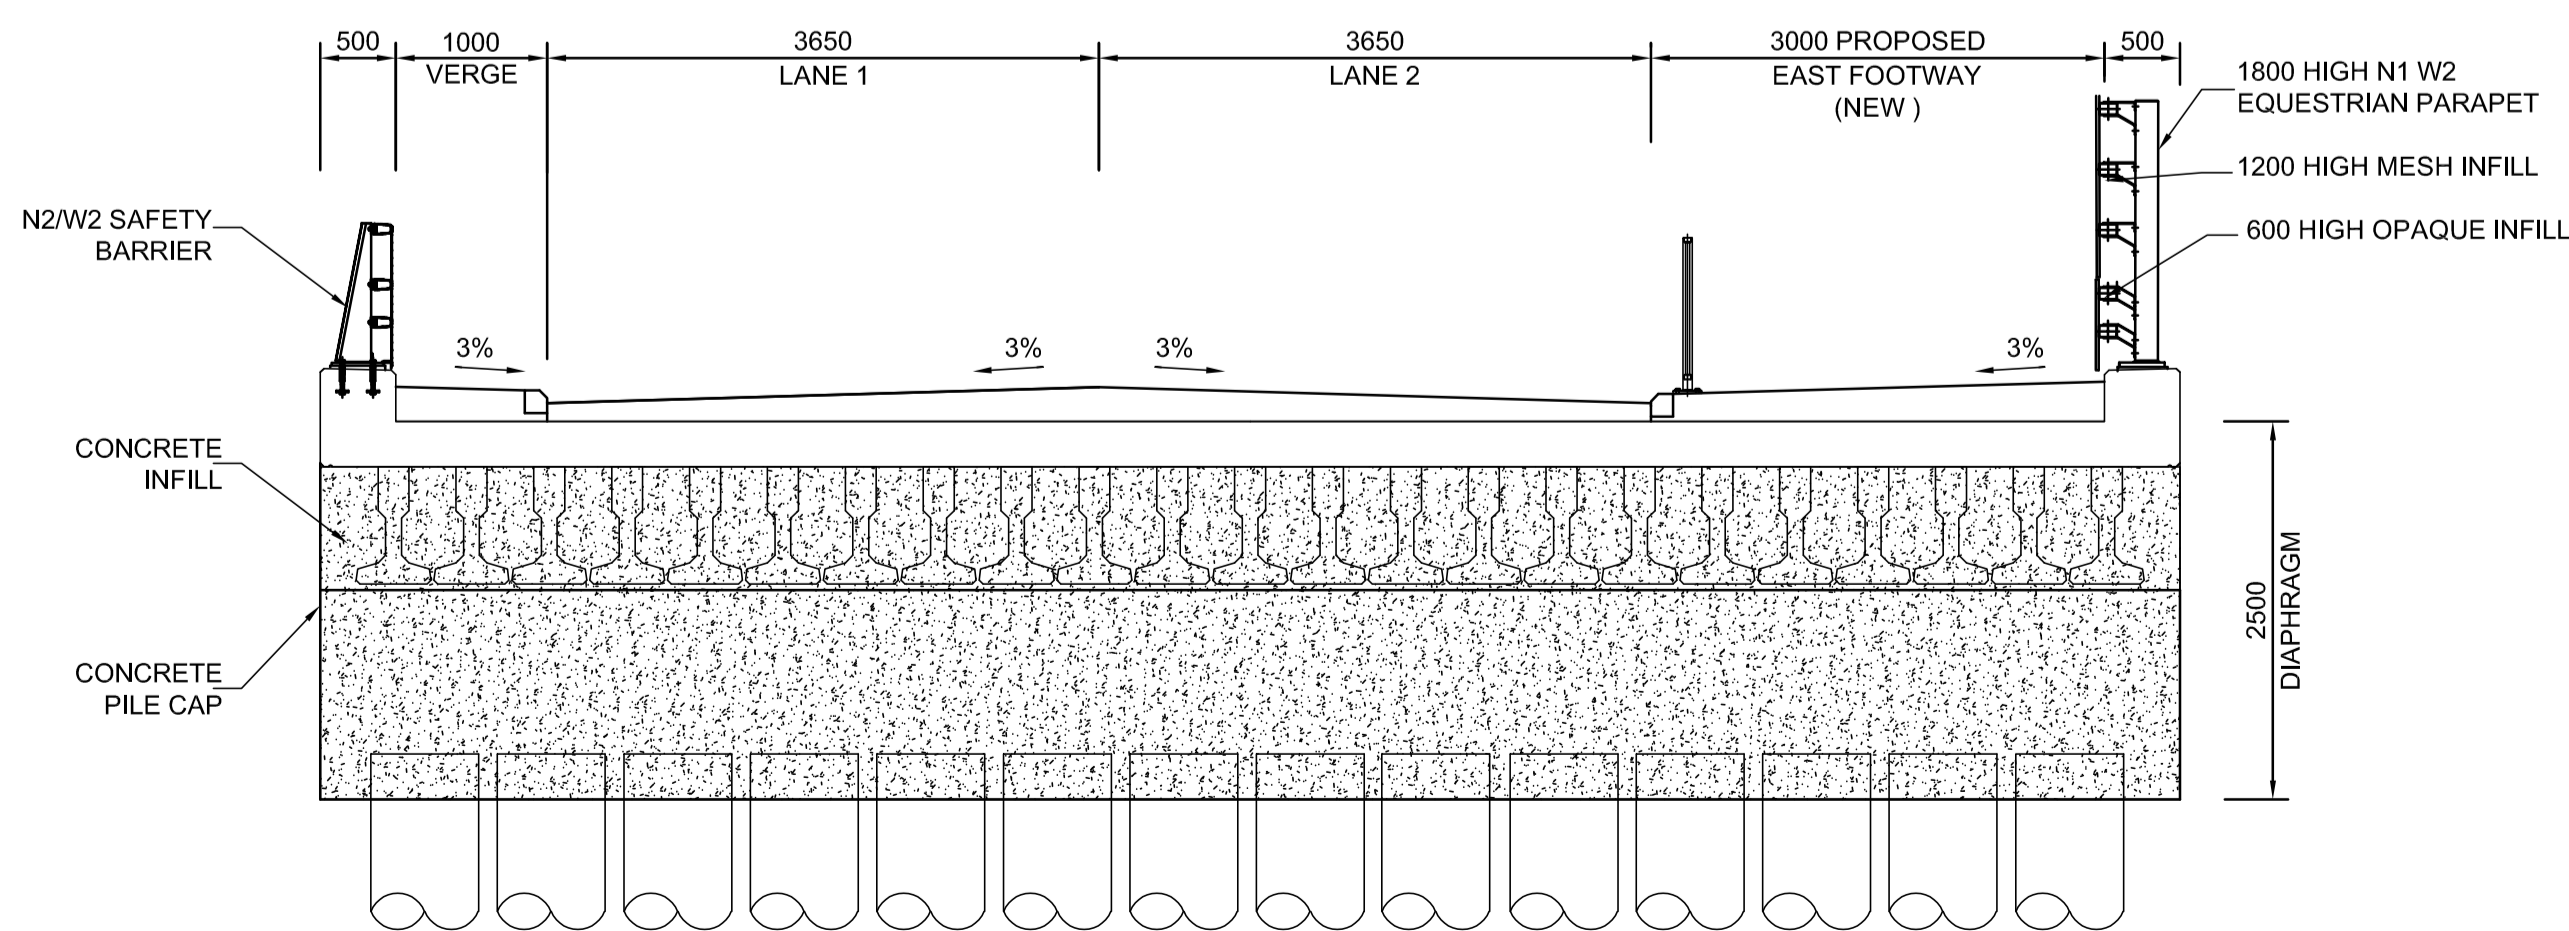

SECTION A
Scale 1:50

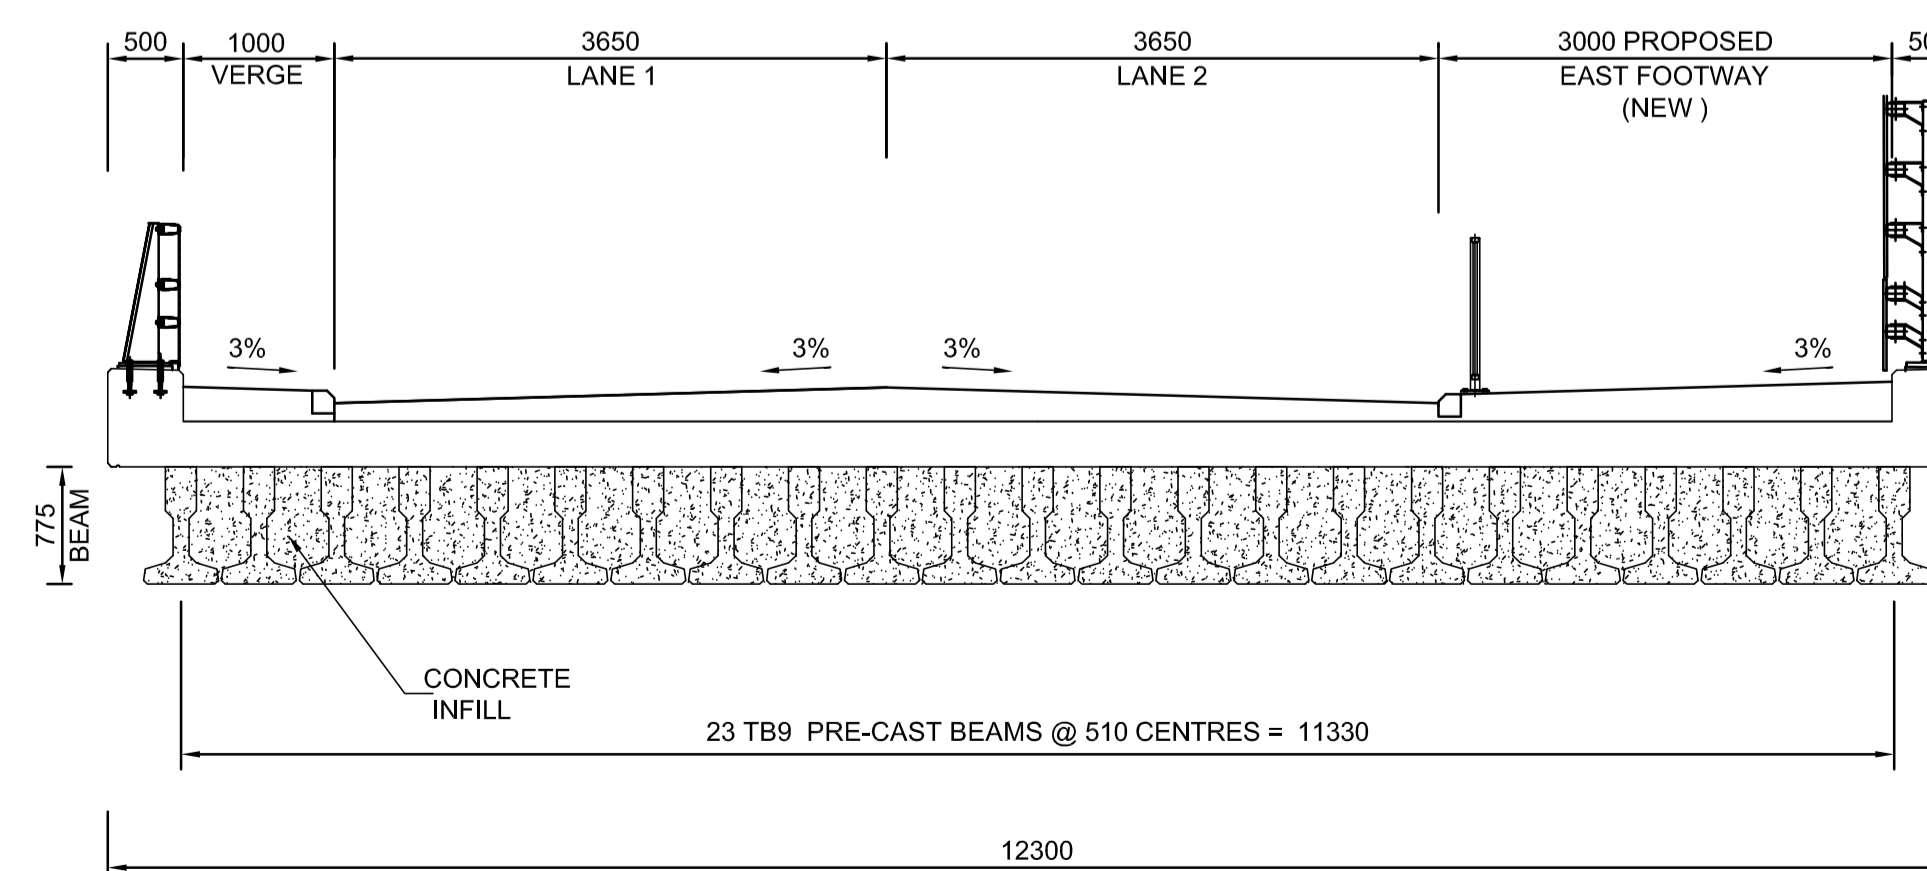

SECTION B
Scale 1:50

Notes:

1. Do not scale from this drawing.
2. All dimensions are in millimetres unless otherwise noted.
3. The structure element dimensions are shown based on conceptual design and subject to change at detailed preliminary design stage.

Lincolnshire Highway Alliance drawing created using base information supplied by external party detailed below:
Base Information Provided By:
Client Provided Drawing Number:

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH AIP REFERENCE 70036923-WSP-SBR-LEB_RWB-RP-S-0001
FOR THIRD PARTY USE, THIS DRAWING SHALL BE DEEMED CURRENT ONLY AT THE DATE OF APPROVAL. PLEASE CHECK FOR AMENDMENTS BEFORE USE

Revision: Description Drawn By: CAD Approved By: Date

Amendment Details Drawing 1st Approval
1st Approval by: GP Date: 28 NOV 2017

Drawn/Designed by: CAD Drawing Creation
JP Created By: Date: 27/11/17
KT

Scale: (@A1)
Primary: AS SHOWN (Do not scale from this drawing)
Secondary:


Lincolnshire COUNTY COUNCIL
Highways Alliance
TECHNICAL SERVICES PARTNERSHIP
26 FLOORS
MILL HOUSE
BRADFORD WHARF NORTH
LINCOLN LN1 1YT
Customer Service Centre 01522 783070
BSI
Certificate No. FS20754

738233-WSP / SBR / XX-DR / C-0003 Rev.A1
Scheme Reference Job Ref. DFT Series No. Drawing No. Revision.

Alternative Scheme Code: Road No:
Parish: LINCOLN
Structure No: SCN No: Site Ref:


Description:
LINCOLN SOUTHERN BYPASS
GRANTHAM ROAD OVER BRIDGE
GENERAL ARRANGEMENT
OPTION 1

LINCOLNSHIRE COUNTY COUNCIL - Reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationery Office © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. OS Licence 1000252370
ESF Border Issue 2016

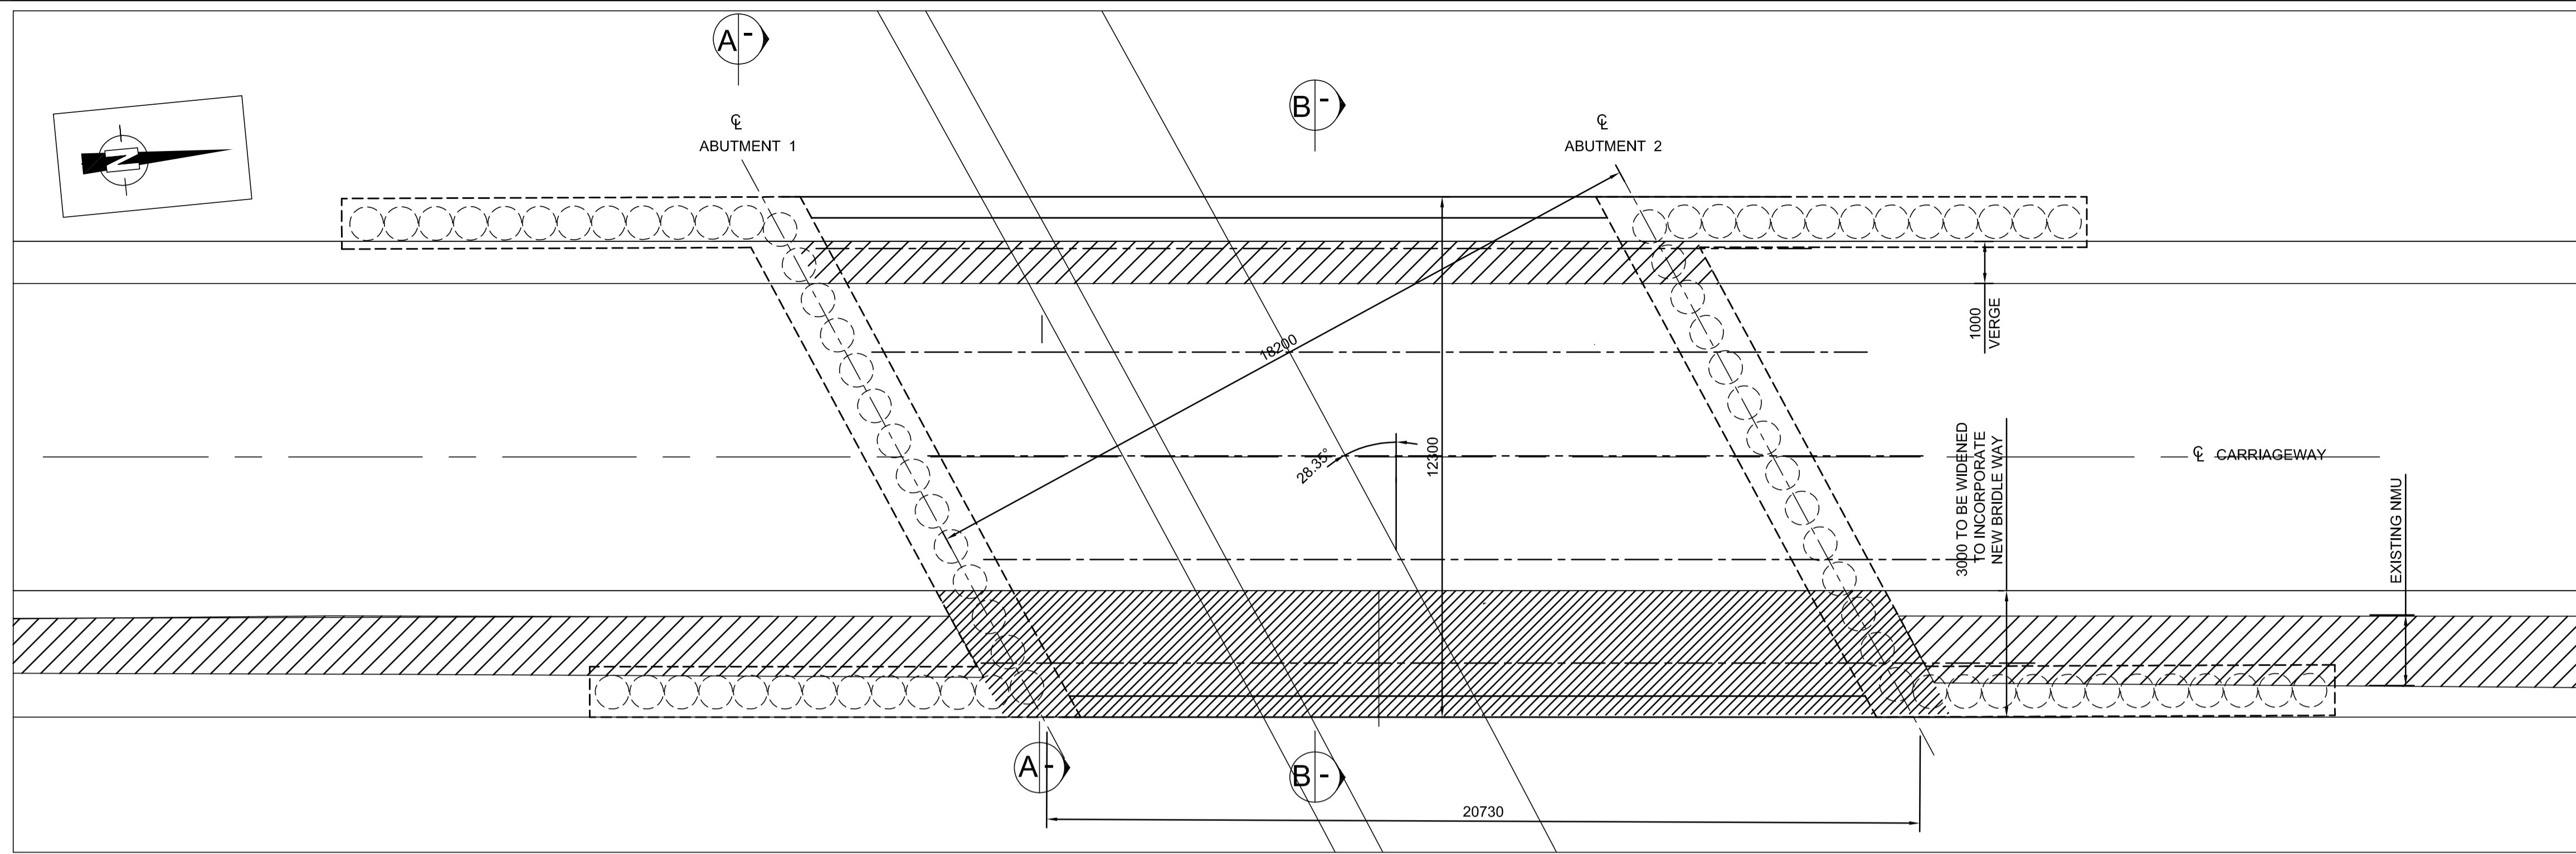


PLAN

Scale 1:100

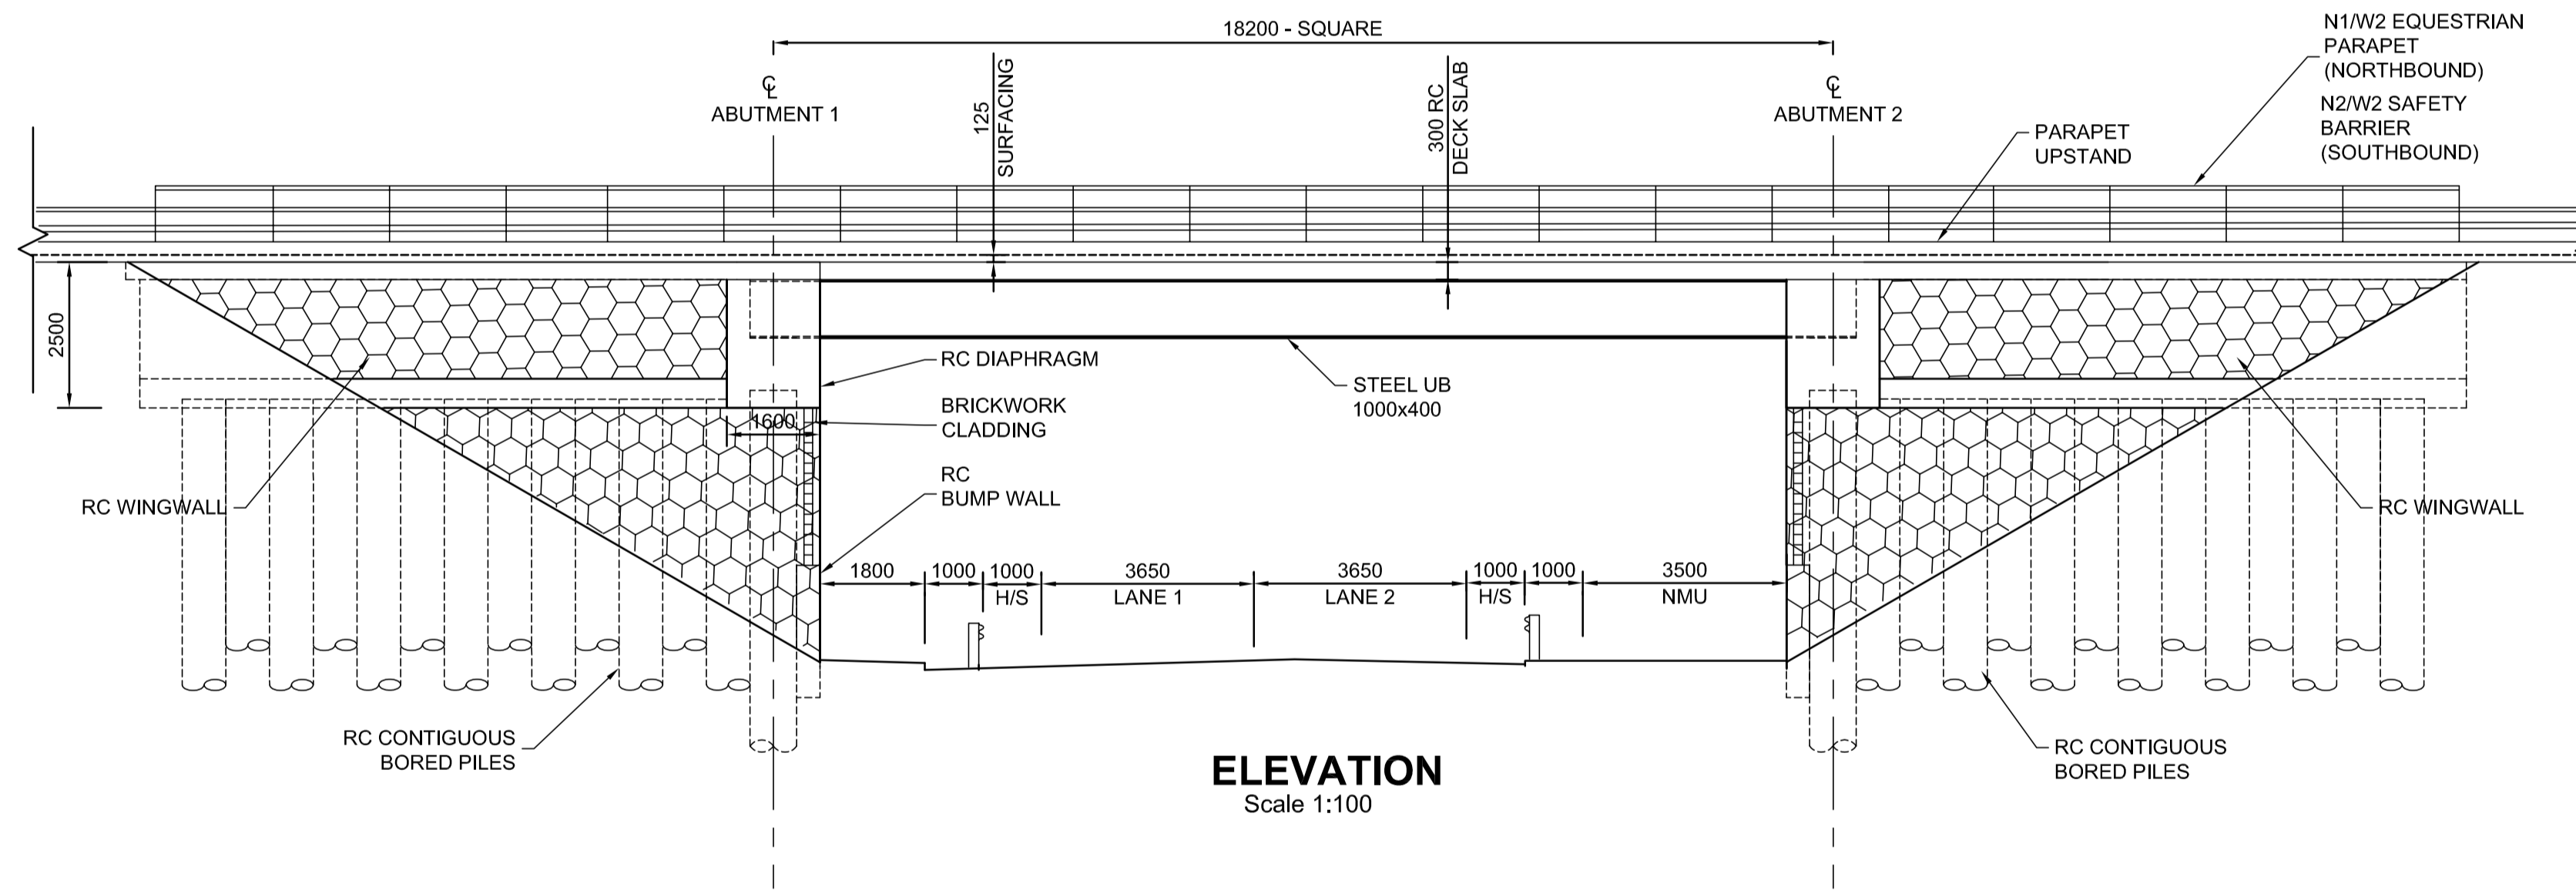


ELEVATION

Scale 1:100

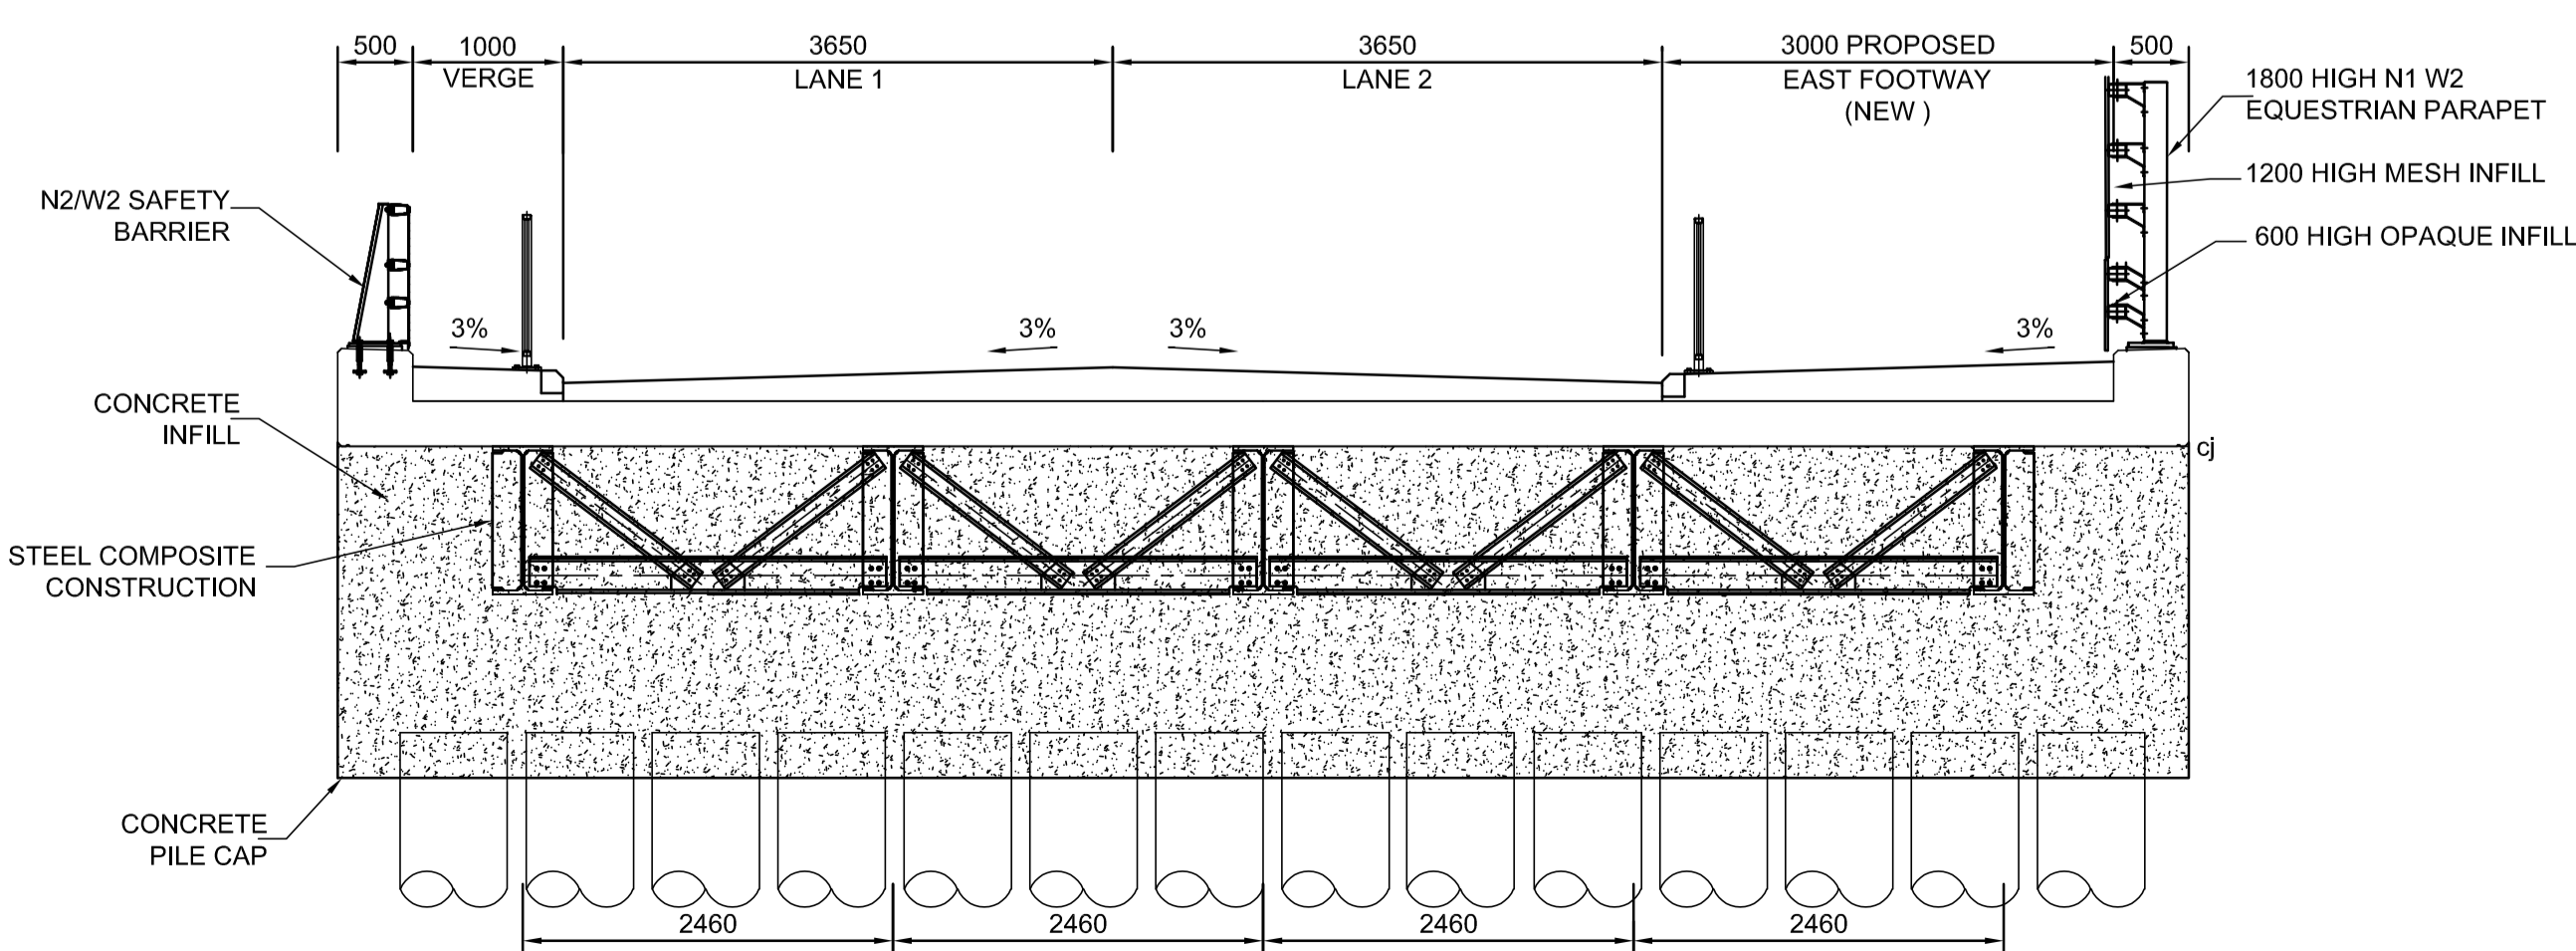

SECTION A

Scale 1:50

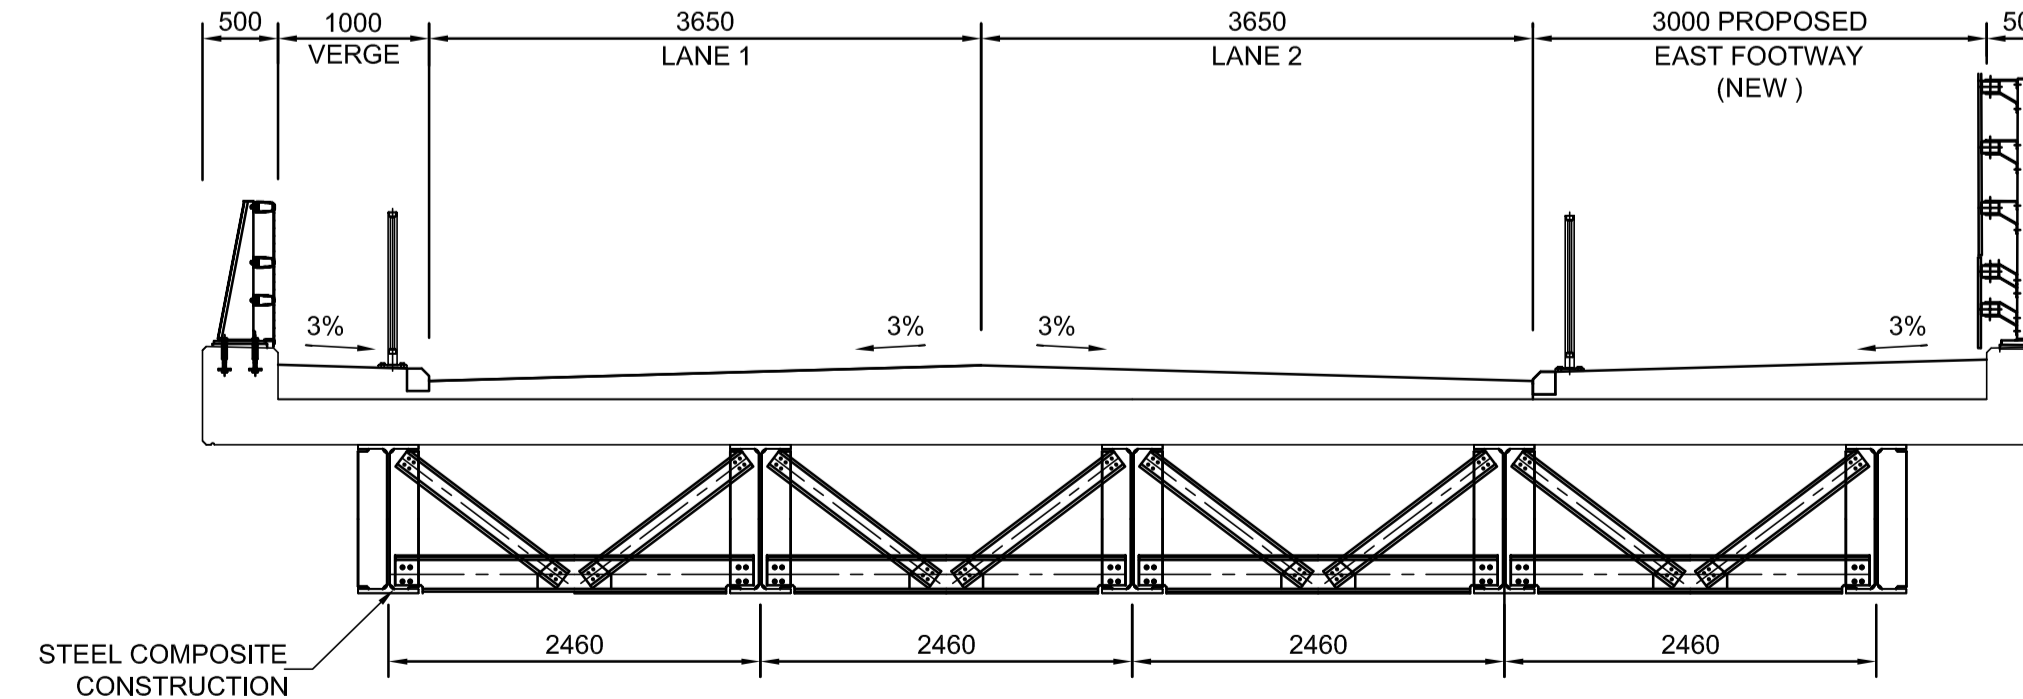

SECTION B

Scale 1:50

Notes:

1. Do not scale from this drawing.
2. All dimensions are in millimetres unless otherwise noted.
3. The structure element dimensions are shown based on conceptual design and subject to change at detailed preliminary design stage.

Lincolnshire Highway Alliance drawing created using base information supplied by external party detailed below:
Base Information Provided By:
Client Provided Drawing Number:

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH AIP REFERENCE 70036923-WSP-SBR-LEB_RWB-RP-S-0001

FOR THIRD PARTY USE, THIS DRAWING SHALL BE DEEMED CURRENT ONLY AT THE DATE OF APPROVAL. PLEASE CHECK FOR AMENDMENTS BEFORE USE

Revision: Description Drawn By: CAD Approved By: Date

Amendment Details

Drawing 1st Approval

1st Approval by: GP Date: 28 NOV 2017

Drawn/Designed by: JP CAD Drawing Creation

Created By: KT Date: 27/11/17

Scale: (@A1)

Primary: AS SHOWN (Do not scale from this drawing)

Secondary:

Lincolnshire COUNTY COUNCIL
Highways Alliance
TECHNICAL SERVICES PARTNERSHIP
26 FLOORS
MILL HOUSE
BRADFORD WHARF NORTH
LINCOLN LN1 1YT
Customer Service Centre: 01522 783070
Certificate No. FS20754

738233-WSP / SBR / XX-DR / C/0004 Rev.A0

Alternative Scheme Code: Road No:

Parish: LINCOLN

Structure No: SCN No: Site Ref:

Description:

LINCOLN SOUTHERN BYPASS

GRANTHAM ROAD OVER BRIDGE

GENERAL ARRANGEMENT

OPTION 2

LINCOLNSHIRE COUNTY COUNCIL - Reproduced from Ordnance Survey material with the permission of Ordnance Survey on behalf of the Controller of Her Majesty's Stationery Office © Crown copyright. Unauthorised reproduction infringes Crown copyright and may lead to prosecution or civil proceedings. OS Licence 1000252370

15F-Boards Issue 2016